




**NEW FIRE STATION
NORTHBOROUGH, MA**

MARCH 20, 2024





METAL ROOF: STANDING SEAM



BI-FOLD APPARATUS DOORS + TRAINING/HOSE TOWER ACCENTS: FORMED METAL OPTION

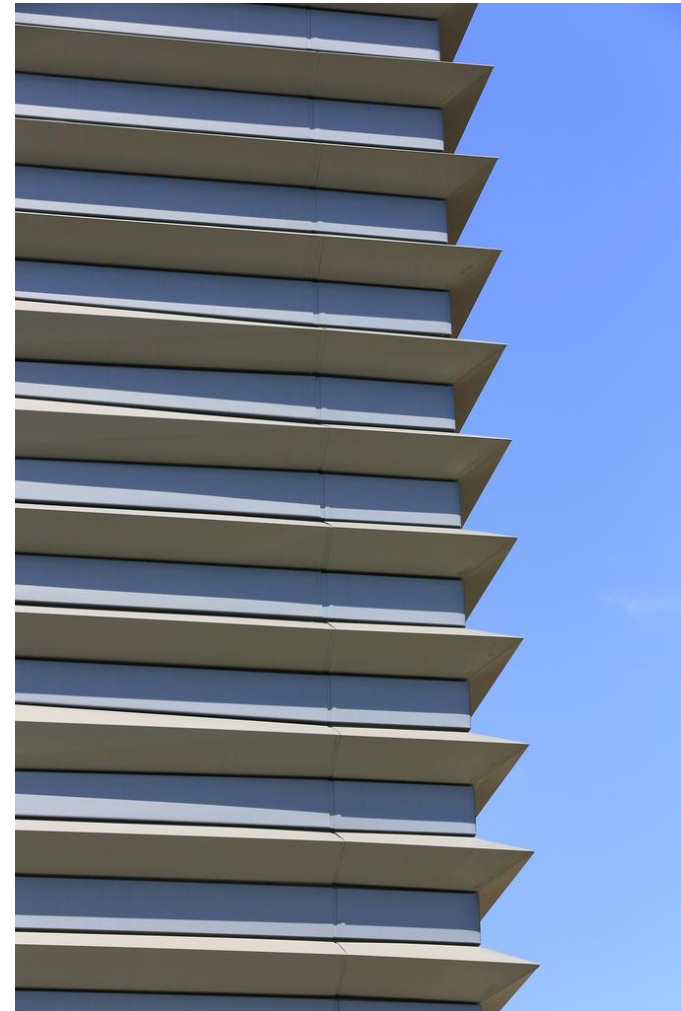

BI-FOLD APPARATUS DOORS + TRAINING/HOSE TOWER ACCENTS: COMPOSITE METAL PANEL OPTION

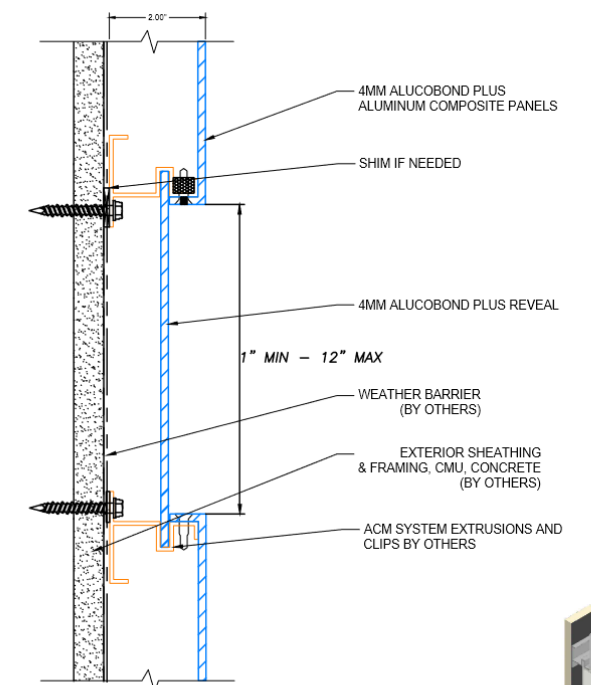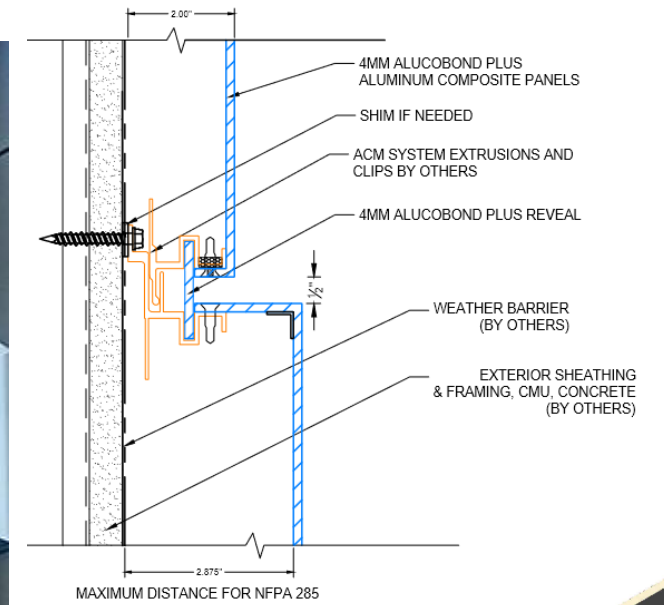

COLOR OPTION #1



NORTH ELEVATION - COLOR OPTION 1



COLOR OPTION #1



MAIN ENTRY VIEW - COLOR OPTION 1



APPARATUS BAY VIEW - COLOR OPTION 1

COLOR OPTION #2



NORTH ELEVATION - COLOR OPTION 2



COLOR OPTION #2



MAIN ENTRY VIEW - COLOR OPTION 2




NORTHBOROUGH FIRE STATION - DESIGN DEVELOPMENT - STUDY


APPARATUS BAY VIEW - COLOR OPTION 2

RETAINING WALL: TEXTURE + COLOR


- Three textures commonly available locally
 - Cobblestone + Limestone – same cost
 - Ledgestone – more costly
- Color options:
 - Gray color standard
 - Custom color available
 - Field applied stain – surface applied color only – less durable
 - Admix + hardener – added to formwork during manufacturing – most costly – ties up manufacturer’s equipment + slows their production

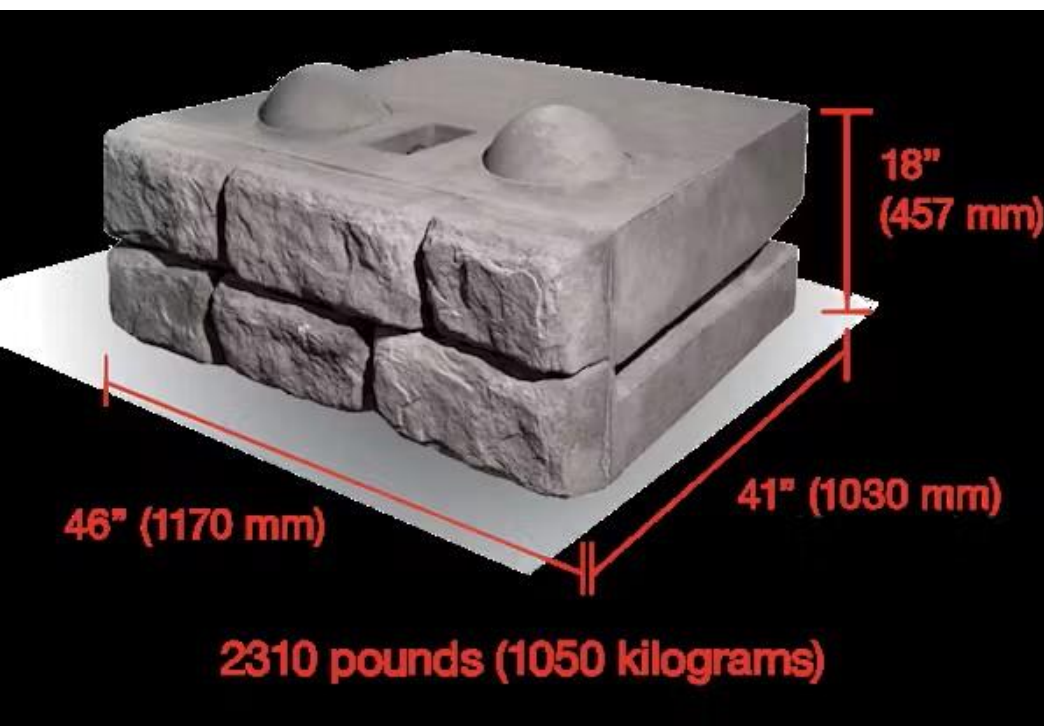

COBBLESTONE

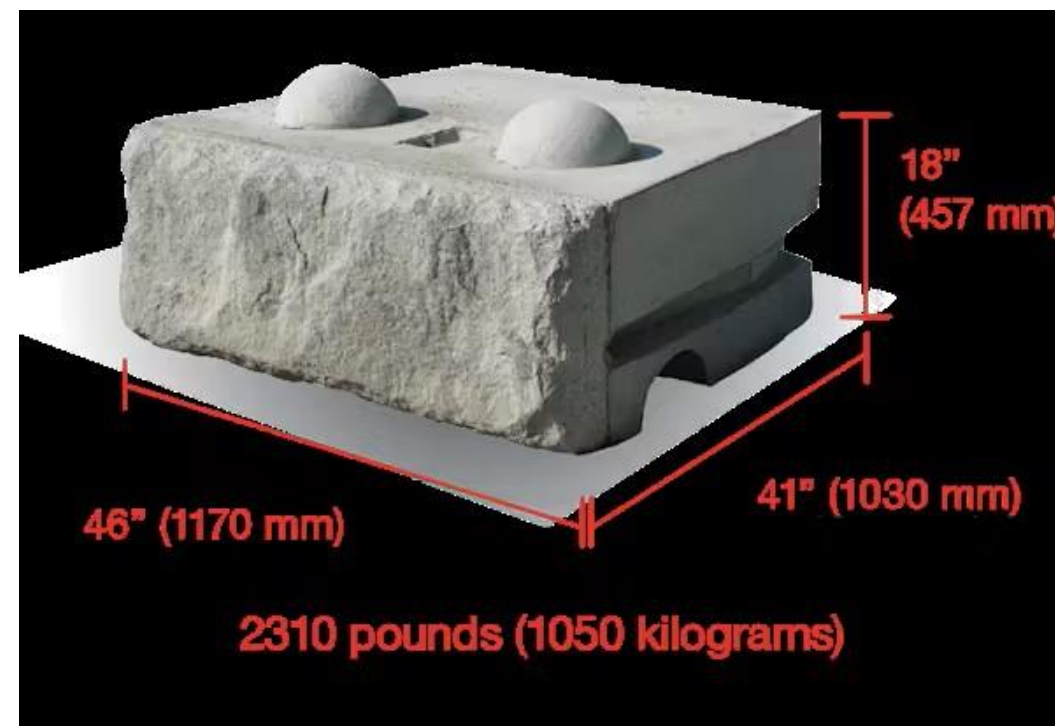

LIMESTONE

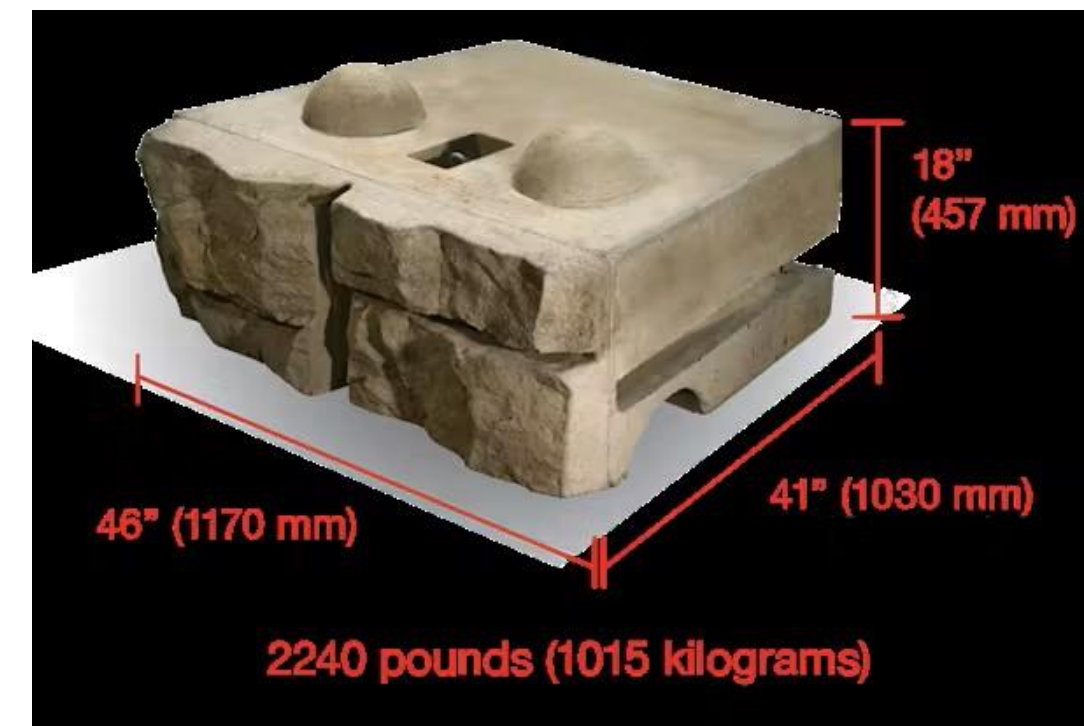

LEDGESTONE



RETAINING WALL – COBBLESTONE TEXTURE



RETAINING WALL – LIMESTONE TEXTURE



RETAINING WALL – LEDGESTONE TEXTURE

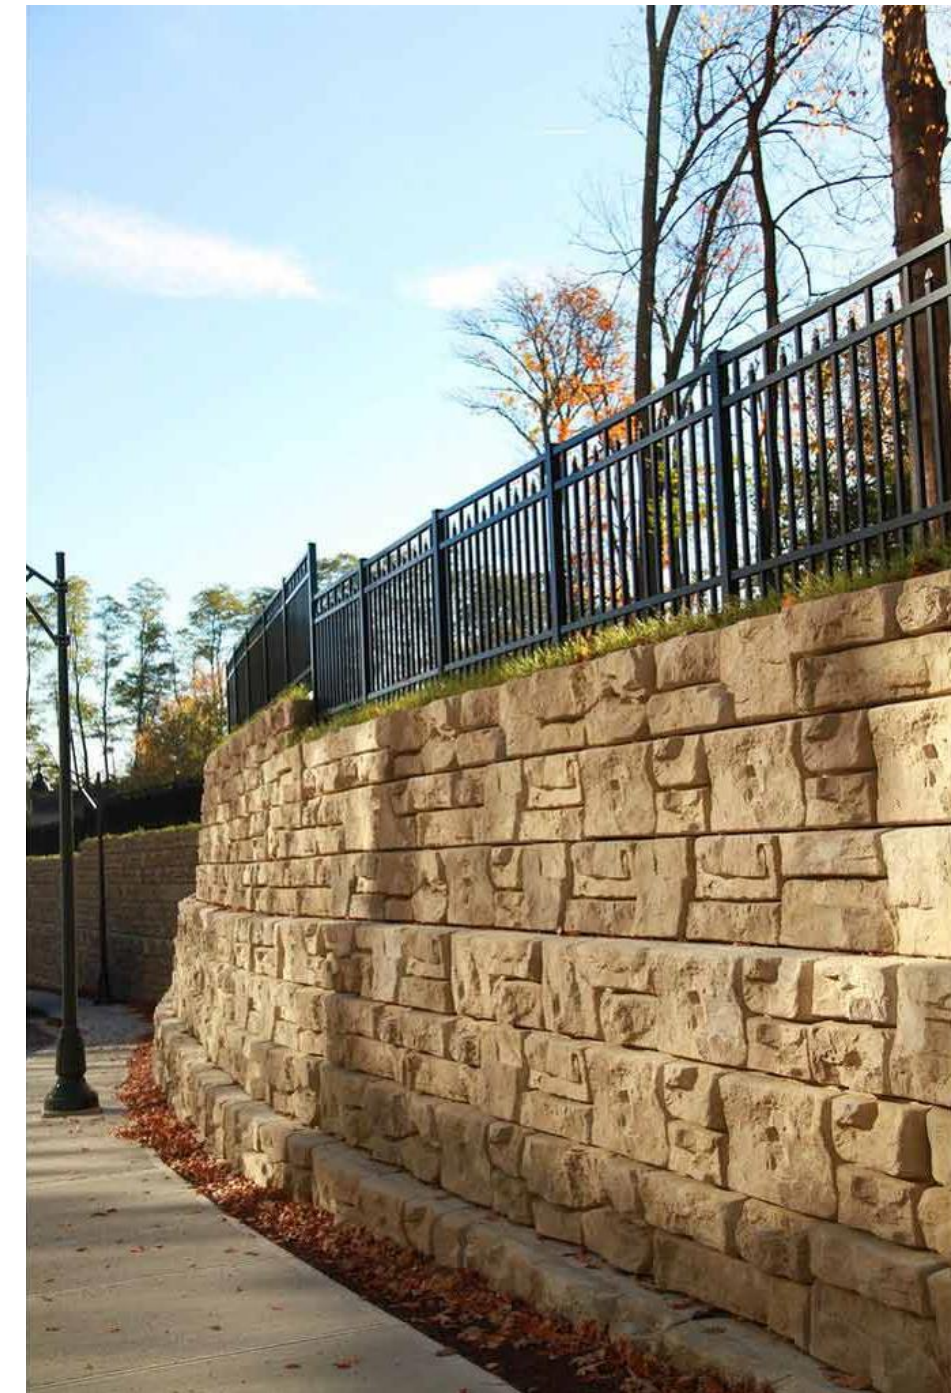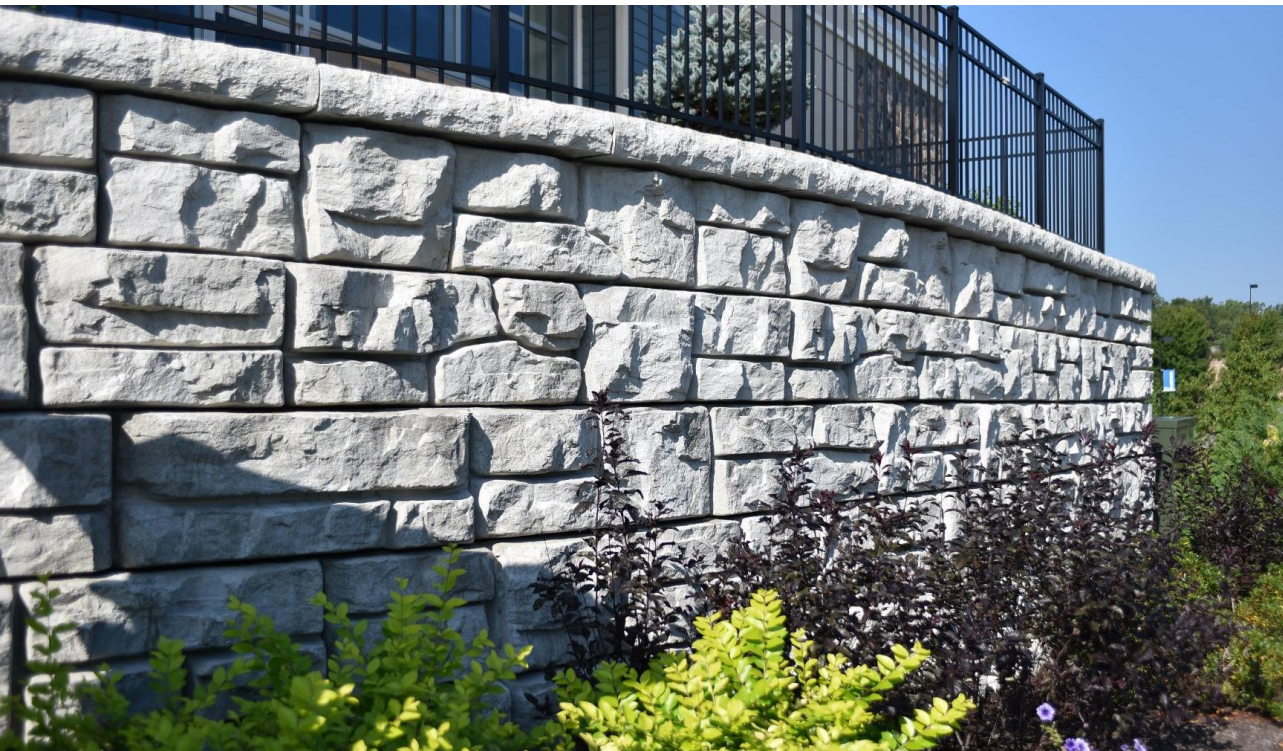

RETAINING WALL – LEDGESTONE TEXTURE



RETAINING WALL – BATTER WALL OPTION

- Geogrid not anticipated for batter
- Straight wall with geogrid on east + west sides
- 30' high – 17-2-1/2" deep batter wall on south side



AM AND BED ON ALL DISTURBED AREAS UNLESS NOTED OTHERWISE. REFER TO LANDSCAPE IN LANDSCAPED AREAS.

E CONSTRUCTED WITH DETECTABLE WARNING PAVERS.

H CONTRACTOR SHALL EMPLOY A PROFESSIONAL LAND SURVEYOR REGISTERED IN THE STATE OF MASS. ON THE SITE AND TO PERFORM FIELD MEASUREMENTS AS REQUIRED TO LAYOUT THE PROPOSED TO. THE CONTRACTOR'S SUPERVISOR SHALL COORDINATE THE BUILDING LAYOUT WITH THE PROJECT 7 LOCATE THE BUILDING ON THE SITE.

I FOR ALL CONCRETE ENTRANCE PADS.

J FOR ALL TYPICAL SECTIONS OF ENTRY WAYS.

K UNLESS OTHERWISE NOTED.

L UNLESS OTHERWISE NOTED.

M ARE TO BE MARKED WITH 4" THICK WHITE EPOXY PAVEMENT MARKING UNLESS NOTED OTHERWISE. #68 ARE NOT ACCEPTABLE.

N PLACEMENT OF BOLLARDS SURROUNDING TRANSFORMER WITH NATIONAL GRID.

O PLACEMENT OF BOLLARDS SURROUNDING GENERATOR WITH ELECTRICAL DRAWING, UTILITY 8 RECOMMENDATIONS.

P AND SIZE WITH OWNER'S REPRESENTATIVE PRIOR TO INSTALLATION.

Q NOTES.

